

Making the ContestConsole Tune lead is a simple process.

1) MOLEX plug


Using the instructions for the ICOM Click2Tune, install the white MOLEX plug.

Pin 1 = Blue (pointed end of plug)

Pin 2 = Yellow

Pin 3 = Red

Pin 4 = Green/black (GND/Screen)

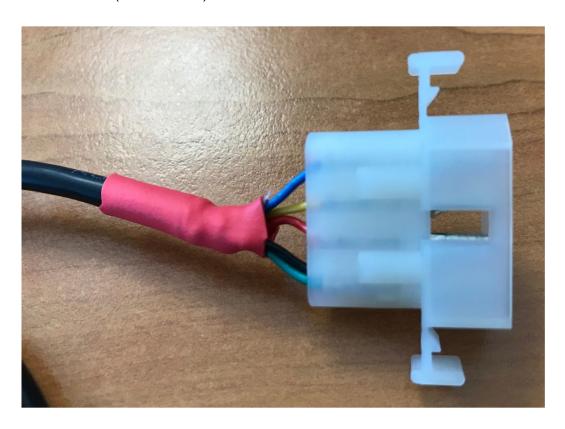

2) DIN plug

Remove the plastic shroud from the DIN plug.

Slide it over the cable.

Solder the wires as shown.

Pin 1 = Green

Pin 2 = Red

Pin3 = Yellow

Pin 4 = Blue



The shield should not be connected.

The cable should be gripped in the plug shell as shown in the photo below. Reassemble the plug.



